

Comfort 530 L





101069 Comfort 530 L

Article

Item no.	Description
101068	Comfort 530 L Set for 1-leaf swing gates up to 3.5 m: 24 V-DC motor, 3,000 N, 20 cm/s, 115°
101069	Comfort 530 L Set for 2-leaf swing gates up to 3.5 m: 24 V-DC motor, 3,000 N, 20 cm/s, 115°

Scope of delivery

101068

- Motor unit, pre-wired 6x0.75 mm² 1,500 mm
- External control Control x.52
- Digital 921 Module receiver, 868 MHz bi.linked
- Digital 564 mini hand transmitter 4-channel, 868 MHz bi.linked
- Gate and angle bracket
- Installation material

101069

- First and second motor unit, pre-wired 6x0.75 mm² 1,500 mm
- External control unit Control x.52
- Digital 921 Module receiver, 868 MHz bi.linked
- Digital 564 mini hand transmitter 4-channel, 868 MHz bi.linked
- Gate and pillar angle
- Installation material

Features

Opener

- Current-dependent obstacle detection - no active closing edge protection necessary
- End position setting directly at the control
- Reference point technique
- Concealed running operator unit
- Very quiet mechanism
- All mechanical parts protected against weather influences
- Sturdy die-cast aluminum housing and UV-resistant plastic covers
- Gate and pillar angle for easy motor installation
- Lockable unlocking device
- Can be used on rising gates up to a slope of 10% (additional accessories required)

Structure and connection

- Pluggable radio receiver
- Connection (conventional) for push button
- Connection (conventional) for 2-wire or 4-wire photoelectric sensor OPEN and CLOSED
- Connection (conventional) for holding circuit
- Connection (conventional) for 8.2 kOhm contact strip OPEN and CLOSED
- Connection (conventional) for 24 V-DC signal light
- Connection (conventional) for electric lock 24 V-DC
- Connection (MS bus) for handheld programmer and expansion modules
- Connection for battery backup
- Output 24 V-DC, max. 50 mA

Operation

- Marantec EOS programming
- Programming and status message via LC display
- Programming and diagnostics possible via optional external handheld programmer

Functions


- Power-saving technology
- Soft start/soft stop/soft run
- Electronic anti-deferral device
- Blocking protection
- Runtime limit
- Automatic feed function (can only be used in conjunction with a light barrier)
- Gate open time and prewarning time separately programmable
- Lighting duration programmable and switchable by radio
- Automatic cut-out OPEN and CLOSE separately programmable
- Partial opening programmable
- Active leaf function programmable for 2-leaf gates
- Running speed OPEN and CLOSE separately programmable
- Soft run position OPEN and CLOSE separately programmable
- Soft run speed OPEN and CLOSE separately programmable
- Relay output programmable: signal light, door position OPEN or CLOSED, wipe impulse (1 s), fault, lighting
- Cycle counter
- Maintenance interval programmable
- Error signaling with error memory
- Multi-level reset function (control, safety, radio, etc.)

Technical data


	Comfort 530 L
Operating mode (duty cycle)	S2 - 5 min
Push and pull force (max.) [N]	3,000
Running speed (max.) [cm/s]	2
Opening angle (max.) [°]	115
Motor voltage [V]	24 V-DC
End position system	Reference point technique
Protection class	IP44

Technical drawings


Comfort 530 L

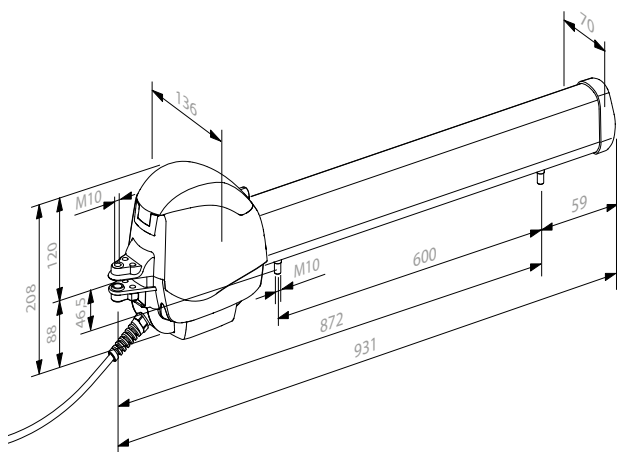

Control x.52

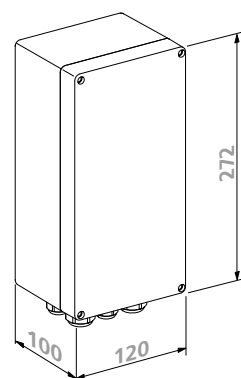

Area of use

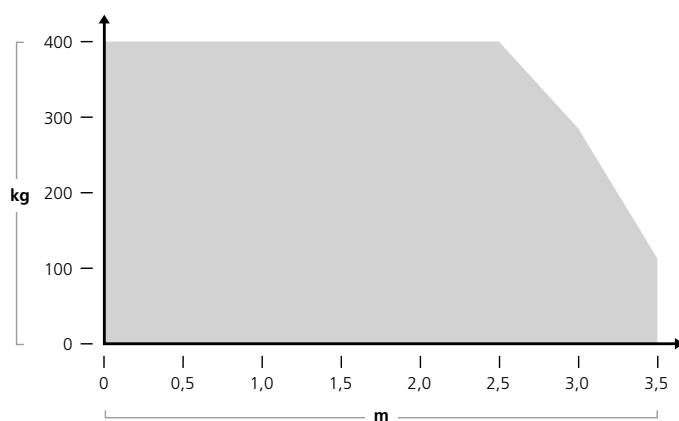

● Comfort 530 L

Operator specific accessories



Special 530

Fastening set for swing gates with rising hinges and a slope of max. 10%

104733

100.00 €



Special 516

Connection cable 6x0.75 mm² with cable cover for direct installation in the operator housing, 10 m

167922

43.00 €



Connecting cable

8x0.75 mm², 10 m

102670

41.00 €

Technical data

	Comfort ST3024	Comfort ST5024E	Comfort RA2224	Comfort RA2224E	Comfort RA4224E
Width gate wing (max.) [m]	3	5	3		4
Height gate wing (max.) [m]	2				
Weight of gate leaf (max.) [kg]	400	600	500		600
E dimension (min./max.) [mm]	0/0		0/230		0/200
Operating mode (duty cycle)		S2 - 8 min			
Push and pull force (max.) [N]	1,400		1,500		2,000
Running speed (max.) [cm/s]	2.5	2.7	2.6		1.5
Opening angle (max.) [°]	128	122	120		
Movement stroke (max.) [mm]	400	490	415		
Motor power [kW]	0.09	0.12	0.09		0.12
Motor voltage [V]	24 V-DC				
Encoder	No	Yes	No	Yes	
Protection class	IP44				
Continuous sound pressure level (max.) [dB(A)]	70				
Temperature (min./max.) [°C]	-20/55				

	Comfort 515	Comfort 515 L	Comfort 516	Comfort 516 L	Comfort 525	Comfort 525 L	Comfort 530 L
Width gate wing (max.) [m]	2.5	3.5	2.5	3.5	3	4	3.5
Height gate wing (max.) [m]	2						
Weight of gate leaf (max.) [kg]	200				400		350
Gradient (max.) [%]					10		
E dimension (min./max.) [mm]	0/160	0/260			0/160	0/260	100/200
Operating mode (duty cycle)	S2 - 5 min						
Push and pull force (max.) [N]	1,000				3,000		
Running speed (max.) [cm/s]	2						
Opening angle (max.) [°]	120	115	120	115	120	115	
Movement stroke (max.) [mm]	413.5	613.5	413.5	613.5	405	605	600
Motor voltage [V]	24 V-DC						
End position system	Electronic limit switches		Reference point technique				
Protection class	IP44						
Continuous sound pressure level (max.) [dB(A)]	70						
Temperature (min./max.) [°C]	-20/60						

Technical data

	Comfort REP2224	Comfort UN3224	Comfort UN3224E
Width gate wing (max.) [m]	2.3	3.5	
Height gate wing (max.) [m]	2		
Weight of gate leaf (max.) [kg]	250	600	
E dimension (min./max.) [mm]	0/200	0/0	
Operating mode (duty cycle)	S2 - 8 min		
Output torque [Nm]	120	250	
Opening angle (max.) [°]	120	90	
Motor power [kW]	0.12		
Motor voltage [V]	24 V-DC		
Encoder	No		Yes
Protection class	IP44	IP67	
Continuous sound pressure level (max.) [dB(A)]	70		
Temperature (min./max.) [°C]	-20/55		

Swing Gate Operators





Comfort ST300



Comfort ST500



Comfort RA



Comfort 515/515 L



Comfort 516/516 L




Comfort 525/525 L



Comfort 530 L



Comfort RE+



Comfort UN

Marantec America Corporation

5705 Centerpoint Court
Gurnee, IL 60031

+1 847-478-1500 Toll free +1 888-622-2489 +1 847-510-0700

No part of this brochure may be reproduced without our written prior permission.
Subject to change without notice. Please note that the openers and technical
equipment shown in this brochure do not always represent the standard items
included with a product.

Version: April 18, 2025

 We reserve the right to make technical changes.

